


## 2 x 6 W, 2 x 4" AB cabinet loudspeaker EN 54, MDF

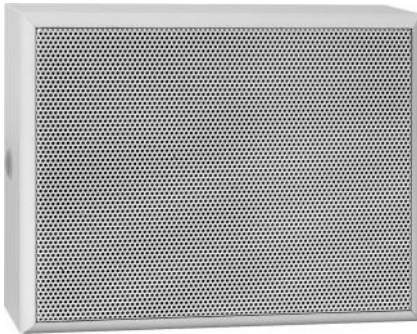

### Part-No.: 582422

The A/B line cabinet loudspeaker for voice alarm systems is certified in accordance with EN 54-24 and offers maximum safety for voice alarm projects.

The WA-AB 06-100/T-EN 54 V features two mutually independent chassis and two 100 V output transformers. It allows for cost-effective supply via two separate (A/B) lines. In the event of a failure of one line, the loudspeaker redundancy allows continued alert of the respective area. For every installation position, the presence of an A line as well as of a B line provides redundancy. The high density MDF wood enclosure (in white) ensures low-resonance sound quality. This version is ball impact resistant and suitable for wall or ceiling mounting. The IP 54 rating guarantees operational safety even under harsh environmental conditions. Both A/B-line loudspeakers respectively feature 2 integrated ceramic terminals and 2 thermal fuses. The chassis are impregnated against moisture.

Rated Power	12 W
Sensitivity EN 54-24, 1 W / 1 m	89,5 dB
Sensitivity EN 54 (double)	92,6 dB
Sensitivity EN 54-24 max (double)	100,1 dB
Sensitivity EN 54-24, max 1 m	97 dB
Transmission range	227 Hz ... 14600 Hz
Ambient temperature	-20 °C ... 80 °C
Color	white, similar to RAL 9010
Weight	approx. 2.3 kg
Dimensions	W: 252 mm H: 192 mm D: 82 mm



Delivery time on request